

AS-910

内置无源分频器驱动的两音路全频音箱

Built-in Passive Crossover Drive Two Full-range Speaker Sound

适用范围 Application

酒吧、多功能厅、歌舞厅、HI房、豪华KTV、等要求很高的场所

Bar, Multi-function Hall, Song And Dance Halls, Hi Room, Luxury Ktv, And Other Places Of High Demand

低音频段补强 Reinforcing Bass Frequencies


若需要延展低音频段,增强音乐感,可适配 AS-3118S 或 AS-3218S 超低频音箱

If You Need To Extend The Bass Frequencies And Enhance The Sense Of Music, You Can Fit AS-3118S or AS-3218S SUBwoofer



音箱技术参数 Technique specification

Drivers	单元组成	LF 低频:1x10" /2.5"Voice-coil (65mm 音圈) /Φ180mm 铝磁 HF 高频:1x1" /1.75"Voice-coil (44mm 音圈) /1.75"PE 膜/Φ120mm 铝磁
Frequency response	频率响应(-3dB)	55-18K Hz 赫兹
Dispersion (HxV)	覆盖角度 (-6dB)	80°x50°号角可 90°旋转 (Rotatable Horn)
Sensitivity	灵敏度	96 分贝/1 瓦.1 米
MaximumSPL	最大声压级	121dB/AES 连续 ; 127dB/Peak 峰值
Nominal Impedance	标称阻抗	8 欧姆 (OHMS)
Power handling	功率承受	300W(AES 额定)/600W (节目) /1000W (Peak 峰值)
Connectors	输入连接器	2xSpeakon NL4MP
Recommended AMP	推荐功放功率	600W @8Ω
Finish	表面处理	咖啡色环保耐磨油漆涂装 Environmentally Friendly Water-Based Wear-resistant Black Paint
Handing Position	吊装	内置多点螺丝承重吊挂和 1xΦ35mm 支撑座 Built-in Multi-point Screws Bearing Hanging And 1xΦ35mm Support Base
Dimensions(HXWXD)	外形尺寸	500mmx325mmx340mm
Net/Gross Weight	净重/毛泽	18.5kg/23.5Kg

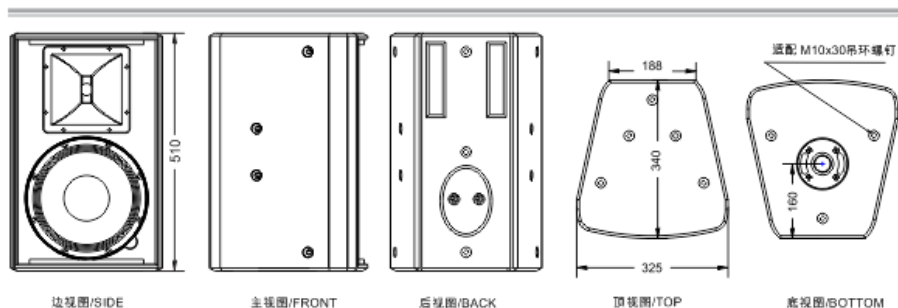

全频音箱系统 AS-SERIES

AS 系列优质驱动器适配倒相加载声学原理的箱体, 既有时尚的视觉感受, 也有完美的听觉内涵, 适用于 KTV 房间、音乐厅, 酒吧等扩声的场所。